


# RSR / CUP HEATER FAN DELETE KIT 993



Prior to installation, please verify that all listed parts are present. Should anything be missing, please contact us promptly.

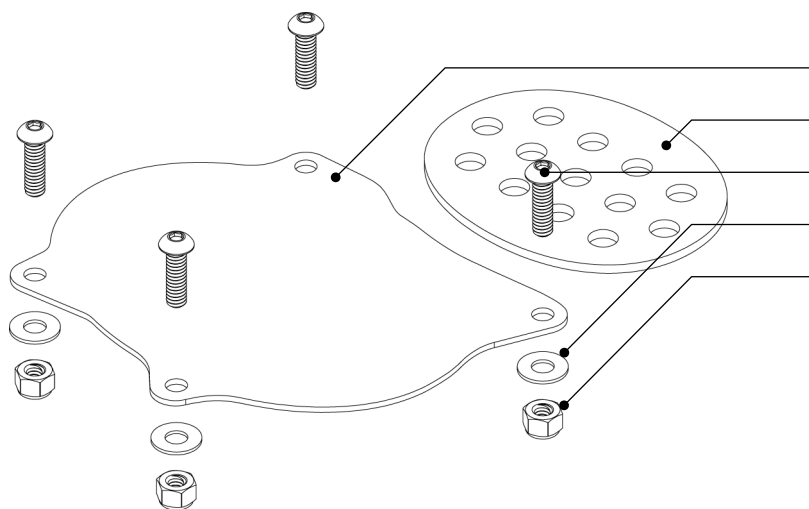

ITEM	PART NAME	QTY.	IN KIT
1	HEAT DUCT BLOCK-OFF PLATE	1	YES
2	FAN BLOCK-OFF PLATE (PERFORATED)	1	YES
3	M6 X 20 BUTTON HEAD	4	YES
4	M6 WASHERS	4	YES
5	M6 NYLOC NUTS	4	YES



**Step 1** - Detach the heater fan assembly along with the ductwork from the engine compartment.

**Step 2** - Insert the perforated fan block-off plate into the rubber fan housing as illustrated in Photo 1.

**Step 3** - If the vehicle had a rubber vent line connected to the fan housing, insert the tube into the perforated plate as depicted.

**Step 4** - Utilize the provided bolts, washers, and nuts. Secure the lower duct block-off plate as shown in Photo 2.

**Step 5** - Alternatively, you may use zip ties to bundle and secure any wires or sensors that were previously connected to the blower assembly and are no longer in use.